LEAK GUARD

Waterproofing Specialists · Innovation AID Sdn Bhd

Date: 11 July 2026
Ref: SVE-0726-956

SITE VISIT ESTIMATE

CUSTOMER	Walter Phoon
PHONE	60123031999
GROUP	SV-0726-013 Walter Phoon - Selangor
ADDRESS	No 55, Jalan SL4/6, Bdr Sg Long, 43000 Kajang
PROBLEM	Slab Leaking
INSPECTED BY	William (KL)

Level 1

FLASHING / LINEAR



MEASUREMENTS


LINEAR SECTIONS			
Ridges 1 (Pink)	14 ft	× 3 ft	= 42.0 sqft
Ridges 2	14 ft	× 3 ft	= 42.0 sqft
Ridges 3	14 ft	× 3 ft	= 42.0 sqft
Ridges 4	14 ft	× 3 ft	= 42.0 sqft
Ridges 5	9 ft	× 3 ft	= 27.0 sqft
V Gutter 1 (Blue)	17 ft	× 3 ft	= 51.0 sqft
V Gutter 2	17 ft	× 3 ft	= 51.0 sqft
Zinc Gutter (Dark Blue)	11 ft	× 3 ft	= 33.0 sqft
Total upturn			**330.0 sqft**

Total membrane area	**330.0 sqft**
Membrane installation @ RM 8.50/sqft	RM 2,805.00
Level 1 subtotal	**RM 2,805.00**

Level 1 - Balcony & Ridges

SLAB + UPTURNS



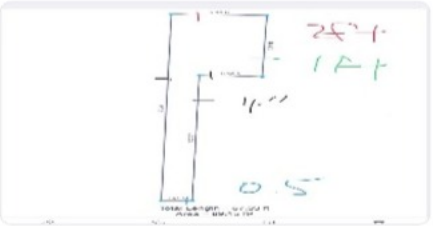

MEASUREMENTS

Floor area			89.2 sqft

UPTURNS

Balcony Side 1 (Green)	5.98 ft	× 2 ft	= 12.0 sqft
Balcony Side 2	9.14 ft	× 1 ft	= 9.1 sqft
Balcony Side 3	3.9 ft	× 0.33 ft	= 1.3 sqft
Balcony Side 4	27.76 ft	× 0.33 ft	= 9.2 sqft
Balcony Side 5	18.63 ft	× 0.33 ft	= 6.1 sqft
Balcony Side 6	1.92 ft	× 0.5 ft	= 1.0 sqft
Ridges 1 (Pink)	37 ft	× 3 ft	= 111.0 sqft
Ridges 2	37 ft	× 3 ft	= 111.0 sqft
Total upturn			**260.7 sqft**

Total membrane area	**349.9 sqft**
Membrane installation @ RM 8.50/sqft	RM 2,975.00

ADDITIONAL SERVICES

WASA	89 sqft	@ RM 2.00	RM 178.00
Services subtotal			**RM 178.00**

Level 1 - Balcony & Ridges subtotal	**RM 3,153.00**

GF

FLASHING / LINEAR



MEASUREMENTS

LINEAR SECTIONS

Flashing 1	9 ft	× 3 ft	= 27.0 sqft
Flashing 2	17 ft	× 3 ft	= 51.0 sqft
Flashing 3	4 ft	× 3 ft	= 12.0 sqft
Flashing 4	4 ft	× 3 ft	= 12.0 sqft
Flashing 5	12 ft	× 3 ft	= 36.0 sqft
Total upturn			**138.0 sqft**

Total membrane area **138.0 sqft**

Membrane installation @ RM 8.50/sqft RM 1,173.00

GF subtotal **RM 1,173.00**

GF-Part 2

FLASHING / LINEAR





MEASUREMENTS

LINEAR SECTIONS

Flashing 1	12 ft	× 3 ft	= 36.0 sqft
Flashing 2	3 ft	× 3 ft	= 9.0 sqft
Flashing 3	4 ft	× 3 ft	= 12.0 sqft
Flashing 4	16 ft	× 3 ft	= 48.0 sqft
Flashing 5	3 ft	× 3 ft	= 9.0 sqft
Flashing 6	7 ft	× 3 ft	= 21.0 sqft
Flashing 7	3 ft	× 3 ft	= 9.0 sqft
Ridges 1	17 ft	× 3 ft	= 51.0 sqft
Ridges 2	15 ft	× 3 ft	= 45.0 sqft
Zinc Gutter (Green)	11 ft	× 3 ft	= 33.0 sqft
Total upturn			**273.0 sqft**

Total membrane area **273.0 sqft**

Membrane installation @ RM 8.50/sqft RM 2,320.50

GF-Part 2 subtotal **RM 2,320.50**

ESTIMATED TOTAL — BREAKDOWN

Level 1

Membrane (330 sqft × RM 8.50)	RM 2,805.00
Subtotal	**RM 2,805.00**

Level 1 - Balcony & Ridges

Membrane (350 sqft × RM 8.50)	RM 2,975.00
WASA	RM 178.00
Subtotal	**RM 3,153.00**

GF

Membrane (138 sqft × RM 8.50)	RM 1,173.00
Subtotal	**RM 1,173.00**

GF-Part 2

Membrane (273 sqft × RM 8.50)	RM 2,320.50
Subtotal	**RM 2,320.50**

Method of Statement (Membrane)

1. Surface preparation incl. cut & repair crack and high-pressure water-jet cleaning
2. Angle fillet on surrounding edge of the area
3. First layer bitumen primer apply
4. Second layer torch-on membrane install

TOTAL	RM 9,451.50

TERMS & CONDITIONS

Definitions

- "Company" means the party (Innovation AID Sdn. Bhd.) who provides the services.
- "Client" means the party who receives the services from the Company.
- "Quotation" means this written scope of works and fees by the Company to the Client.

Acceptance

- The Client appoints the Company, which accepts such appointment to provide the Services and Deliverables upon these terms and conditions. Only changes agreed by both parties in writing are valid.
- A Quotation for the services given by the Company shall not constitute an offer. The Quotation is only valid for **fourteen (14) working days** from date of issue.

Payment

- **50% downpayment** before work commencement; the balance is collected upon work completion.
- For payment via bank transfer: **United Overseas Bank (Malaysia) Berhad** · Account Name: **Innovation Aid Sdn Bhd** · Account Number: **231-308-197-6**.
- Payment to be transacted in Ringgit Malaysia only.
- The Company reserves the right to momentarily halt the project if payment is late.
- Should the Client fail to fulfil the payment set out in the Contract, the Client shall pay interest at **10% per annum** (chargeable monthly) on the total outstanding amount until fully paid.

Warranty

- Labour Warranty: **3-year** (e-gel) / **5-year** (membrane) warranty on labour performed by our team, covering workmanship defects related to the installation of waterproofing systems.
- Material Warranty: our supplier provides a **10-year** warranty on waterproofing materials, subject to their terms and proper usage (only applicable for exposed membrane installation).
- The warranty covers only defects directly related to the waterproofing system, such as leaks or material failure, verified by our inspection.

Warranty Exclusion

- The warranty is voided if our waterproofing materials are found damaged due to improper handling, modifications, or external factors (e.g. structural alterations, physical damage, or misuse by third parties).
- We are not responsible for consequential damages, including but not limited to structural damage, mould growth, interior damage, or business losses resulting from waterproofing issues or other causes.
- The warranty does not cover defects caused by natural disasters, unauthorised repairs, or failure to adhere to maintenance.

Material Price Fluctuation

- Due to global volatility affecting petroleum-based raw materials (bitumen, polymers, resins), the prices quoted herein are valid for **7 days** from the date of this quotation. Should documented supplier material costs increase by more than 5% prior to commencement of works, the Company reserves the right to adjust the contract sum accordingly.

Adjustment for Actual Site Measurements

- Should the actual total floor area exceed the size stated in the original quotation — whether due to human error, estimation oversight, or inaccurate site plans — the Company reserves the right to adjust the contract sum proportionally.
- Any additional area shall be charged based on the prevailing pro-rata rate per square foot/meter as established in the original quotation.
- The Client shall be notified of any measurement discrepancy prior to application of materials to the additional area, and the additional cost shall be added to the final claim.

Termination

- If any Company claim for work done is not processed/certified and payment is not made within the agreed time frame, the Company may halt or stop the balance of works and shall not be held responsible for any resulting delay.
- All downpayment, advance payment or deposit paid by the Client is non-refundable; upon the Client's default or unilateral termination, such sums shall be forfeited absolutely as part of the damages, and the Company may claim against the Client for expenses, costs and losses incurred.
- If the Contract Sum or any part is recovered through legal process, the Client shall be liable for the Company's solicitor fees (on a solicitor-and-client basis) and other fees and expenses incurred.

By signing below, I acknowledge that I have thoroughly read and fully understood the terms & conditions above.

INSPECTED BY

William (KL)
Date: 11 July 2026

ACKNOWLEDGED BY

Walter Phoon
Date: _____